

Presidential Pole Series

CONSTRUCTION:

Durable corrosion resistant cast aluminum base with hand hole and cover. The pole shall be 5" dia. x 3/16" wall thickness, extruded 6063-T6 aluminum alloy.

ANCHOR BOLTS:


(4) 3/4" x 16" x 3" up to 18'
and 3/4" x 24" x 3" from 20' to 25'
Fabricated from hot rolled steel.
Hot dip galvanized.

FINISH:


Polyester powder fuse coating.
PP-Primed Painted
BK- Black Paint
BZ - Bronze Paint
GN- Green Paint
VG - Verde Green
(for other colors consult factory)

Ordering Information:

1. Model Number
2. Pole Ht.
3. Finish
4. Options
 - DR - Duplex Receptacle
 - GFI - Ground Fault Interruptor

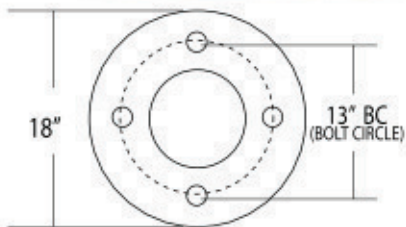

1. Mod. #	2. Pole Ht.	3. Finish	4. Options
PRES			

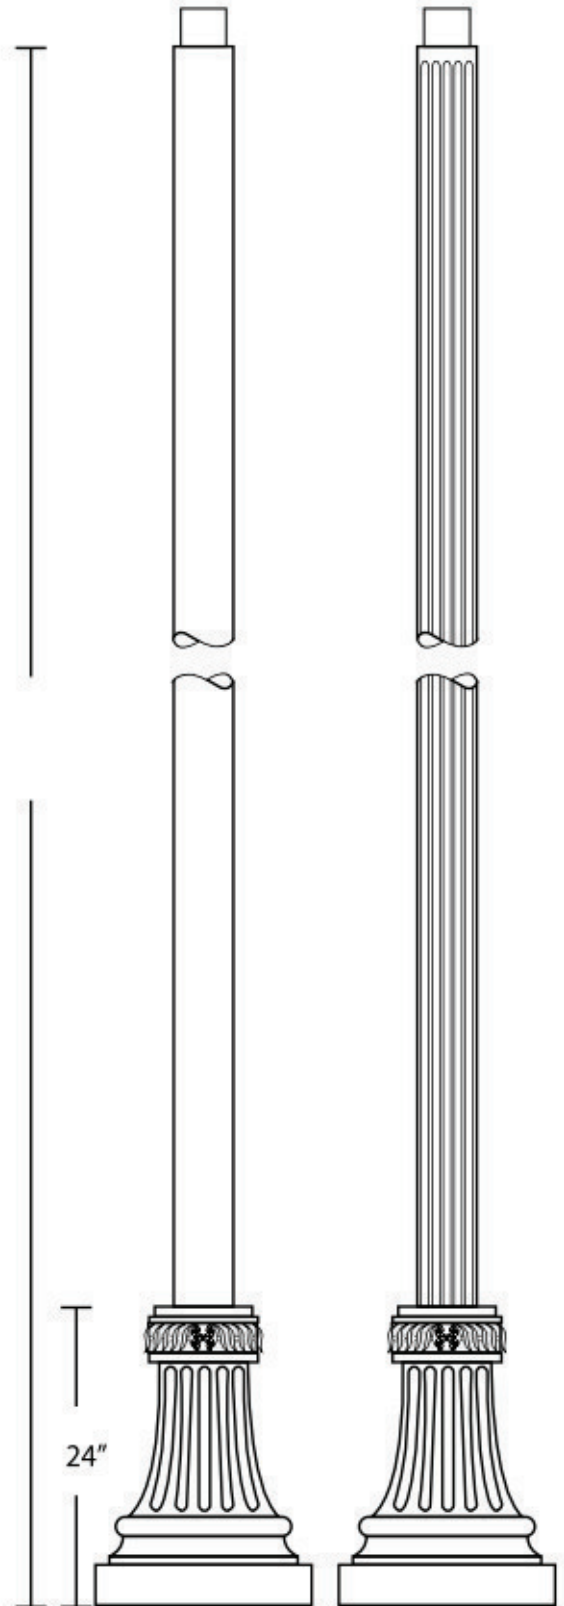

NON - FLUTED

FLUTED

**Pole shafts are available
in both 4" od & 5" od**