

## EasyLED Series

### Reveal Round Bollard



B3Q

#### Housing:

Extruded Aluminum Housing with Flush Mounting Base & Vandal-Resistant Screws, Flat Top, Powdercoat Finish Over a Chromate Conversion Coating, Sealed Driver Compartment.

#### Lens:

Clear Inner Lens to Seal LED Array.

#### Mounting:

Mounting Kit with 8" Anchor Bolts (Included).

#### LumaFit LED:

Delivered Lumens: 1,539 (Clear Array Lens)

CRI: 80+

CCT: 4000K

Rated Life: 50,000 Hours

5-Year Warranty

Aluminum Boards

#### Wattage:

Array: 16.6w, System: 19.7w

#### Driver:

Electronic Driver, 120-277V, 50/60Hz

Dimmable Driver

#### Listings & Ratings:

IP67

Operating Temperatures: -20°C to +40°C

#### Options:

Surge Protection

Custom colors are available upon request. Specify any RAL color desired when requesting a quote.

### Reveal Round Bollard

#### Catalog #

#### Description


#### Complete Units

#### Ordering Information

Example: B3QF1X16U4KCZSP

<b>B3</b>	<b>Model:</b>	B3
<b>Q</b>	<b>LED Mfr:</b>	Q=QSSI
<b>F</b>	<b>Optics:</b>	F=Medium Beam Spread
<b>1X</b>	<b>Number of Arrays:</b>	1X=One
<b>16</b>	<b>Wattage:</b>	16=16w
<b>U</b>	<b>Ballast:</b>	U=120-277V
<b>4K</b>	<b>CCT:</b>	4K=4000K
<b>C</b>	<b>Lens:</b>	C=Clear Array Lens
<b>Z</b>	<b>Color:</b>	Z=Bronze, B=Black CC=Custom Color. Please specify
<b>SP</b>	<b>Options:</b>	SF=Single Fuse, DF=Double Fuse, SP=Surge Protection

DIMENSIONS

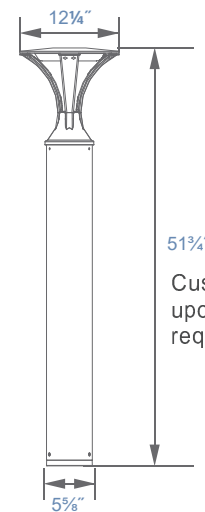

B3Q

Custom heights are available upon request. Specify any height required when requesting a quote.

**Bieber Illumination Group**


PO Box 49303 - Los Angeles, CA. 90049  
310-451-5589 - www.bieberillumination.com

Catalog #	Description
BOLAN4	Mounting Kit, Includes Bracket & Three (3) 4" Anchor Bolts
BOLAN8	Mounting Kit, Includes Bracket & Three (3) 8" Anchor Bolts
BOLAN12	Mounting Kit, Includes Bracket & Three (3) 12" Anchor Bolts
BOLAN15	Mounting Kit, Includes Bracket & Three (3) 15" Anchor Bolts




**EasyLED Series**

**Reveal Round Bollard**



**BOLAN**

**PHOTOMETRICS**

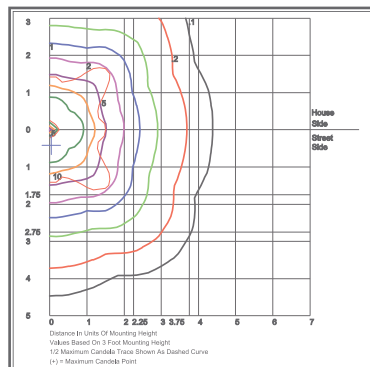

**B3QF1X16U4KC**