

Gama Series



GAMA-T is highly suitable for carparks and shop fronts where direct lighting is required. A simple yet functional modular design, combined with the right lens type, will improve lighting proficiency.

FEATURES & BENEFITS

- Shoe box appearance with advanced LED system.
- Modular design allows for easy installation, replacement and maintenance.
- Corrosion resistant polyester powder painted 100µm thickness.
- Meets a 1000-hour salt spray certification per ASTM B117/ ISO 9227:2012.
- Interchangeable with the other GAMA Series with a bracket change.
- Multiple lighting control options are available, e.g. DALI, 1-10V.
- 10 years limited warranty available.

CERTIFICATIONS

UL/ CUL/ DLC/ LM79/ SAA/ CB/ CE/ ENEC/ ErP/ RoHS/ IK08


Not all products are qualified on the DLC QPL. To view our DLC qualified products please consult the DLC Qualified Product List at www.designlights.org

TECHNICAL PARAMETERS

Power	30-320W
Input	120-277VAC or 220-240VAC or 347-480VAC
PF	>0.95
THD	<20%
L70	>200,000H
Operating Temperature	-40°C ~ +50°C
Efficacy	120-160lm/W
ANSI CCT	3000K/4000K/5000K/5700K
Min CRI	70* or 80 or 85
IP Rating	IP65
SPD	Optional
DALI	Optional
1-10V	Optional
Photocell	/
Smart Control	/
Optic (IESNA)	Type I, Type II, Type III, Type IV, Type V
Color Options	Black/Grey/Bronze/White

* Standard

Mounting options: Bolt-on, as shown, or an adjustable slip-fitter over 2-3/8"od

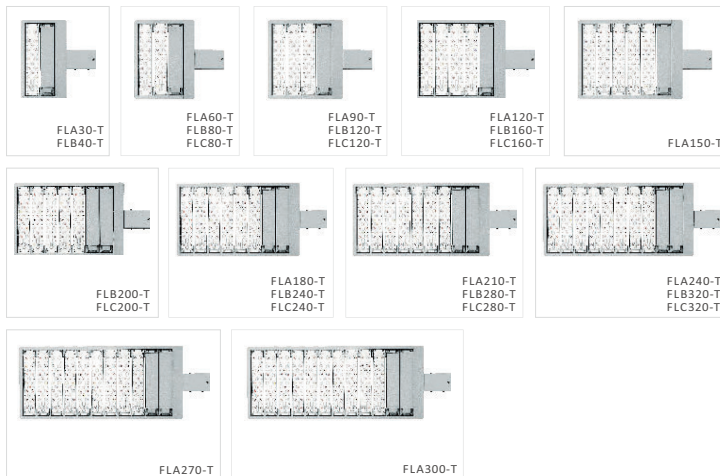

ORDERING INFORMATION

Example : FLA30-T-T5S-50K-BK-00
Choose a mounting arm style: BOA or SF

MODEL (Nominal Power)			MOUNTING	OPTIC LENS	CCT (ANSI)	OPTIONAL COLOR	LIGHTING CONTROL	ACCESSORY INFO
120-277VAC or 220-240VAC (30W/module)	120-277VAC or 220-240VAC (40W/module)	347-480VAC (40W/module)						
FLA30	FLB40	FLC80*	T	T1S	30K	★ BK	00 Not required	Adaptor Bracket
FLA60	FLB80	FLC120*		T2M	★ 40K	GR	01 Photocell	3/5/7-pin NEMA Receptacle
FLA90	FLB120	FLC160*		T3M	★ 50K	BZ	02 Motion Sensor	20KA Surge Protection Device
FLA120	FLB160	FLC200*		T3L	57K	WH	03 Photocell	Safety Cable
FLA150	FLB200	FLC240*		T4S			04 DALI	
FLA180	FLB240	FLC280*		T4M			05 1-10V dimming	
FLA210	FLB280	FLC320*		T5U				
FLA240	FLB320			T5V				
FLA270				T5W				
FLA300				T5S				
				T5M				
				T5L				
				T5X				