

EasyLED Series

EasyLED Varistar Area/Flood/Wall Light



AD25Q
(Shown with Kitty Hawk Mount.)

Housing:

Die Cast Housing with Integral Heat Sinking and Front Frame have a Bronze Powdercoat Finish Over a Chromate Conversion Coating. Photocell Adaptable. Includes Receptacle and Shorting Cap. Photocell Option Not Available When Using WB-Wall Mount Box Option.

Lens:

Tempered Clear Flat Glass Lens

Mounting:

Mount with Optional Easy Hang Wall Bracket, Wall Mount Box, Two-Piece Swivel Bracket, Slipfitter, Kitty Hawk Mounting Arm or Pole Mounting Arm Adaptor.

LumaFit LED:

Array Lumens: 12,493

Delivered Lumens:

56w: 5,989 (4K, F, Clear); 6,545 (5K, F, Clear)

74w: 8,091 (4K, F, Clear); 8,843 (5K, F, Clear)

112w: 11,978 (4K, F, Clear); 13,091 (5K, F, Clear)

CRI: 82

CCT: 4000K, 5000K

Rated Life: 50,000 Hours

5-Year Warranty

Aluminum Boards

Wattage:

Array: 55.8w, 74.3w or 111.5w

System: 60.6w, 80.8w or 121.2

Driver:

Electronic Driver, 120-277V, 50/60Hz or

347/480V, 50/60Hz;

Dimmable Driver

Listing & Ratings:

CSA: Listed for Wet Locations. IP67

Operating Temperatures: -40°C to +40°C

Options:

Surge Protection

Custom Colors Available Upon Request.

Bieber Illumination Group
www.bieberillumination.com
garybieber@yahoo.com
Phone: (310) 451-5589
Po Box 49303
Los Angeles, CA. 90049

EasyLED Varistar Area/Flood/Wall Light

Catalog

Description


Complete Units

Ordering Information

Example: AD25QF1X112U5KCZKASP

AD25	Model:	AD25
Q	LED Mfr:	Q=QSSI
F	Optics:	F=Medium Beam Spread
1X	Number of Arrays:	1X=One
112	Wattage:	56=56w, 74=74w, 112=112w
U	Ballast:	U=120-277V, H=347/480V
5K	CCT:	4K=4000K, 5K=5000K
C	Lens:	C=Tempered Clear Flat Glass Lens
Z	Color:	Z=Bronze
KA	Mounting:	SF=Slipfitter, MA= Pole Mounting Arm Adaptor, KA=Kitty Hawk Arm, WB= Wall Mount Box, EH= Easy-Hang Wall Mount, BR=2-Piece Bracket
SP	Options:	R7=7-Pin ANSI C136.41-2013 Twist Lock Receptacle, SF=Single Fuse, DF=Double Fuse, SP=Surge Protection

DIMENSIONS

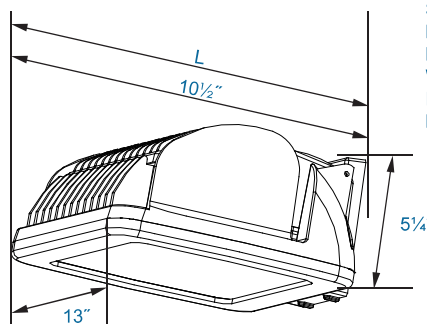

Length with mount (L):

Slipfitter (SF): 14 1/8"

Mounting Arm Adaptor (MA): 14 1/8"

Kitty Hawk Arm (KA): 14 1/8"

Wall Mount Box (WB): 16 3/8"

Easy Hang Wall Bracket (EH): 11 3/8"


Bracket (BR): 14 1/4"

AD25Q

Catalog #	Description
AD25WG	Wire Guard, Stainless Steel Construction.
AD25GSZ	Aluminum House Side Shield, Bronze Powdercoat Finish, Includes Hardware.
FL73SFXZ	External Mount Die-Cast Adjustable Slipfitter for 2 $\frac{3}{8}$ " Tenons, Bronze Powdercoat Finish, Includes Hardware.
FL73BRZ	Two-Piece Stamped Steel Adjustable Bracket, Bronze Powdercoat Finish, Includes Hardware.
ALMAAZ	Die-Cast Adaptor for 2 $\frac{3}{8}$ " Horizontal Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
KH25AZ	Die-Cast Wall Mount Adaptor, Bronze Powdercoat Finish. Use with KH25A Kitty Hawk Mounting Arm only.
KH20RPZ	Die-Cast Adaptor for 3" to 4" Round Poles, Bronze Powdercoat Finish. Use with Kitty Hawk Mounting Arm Only.
KH20WMZ	Die-Cast Wall Mount Adaptor, Bronze Powdercoat Finish. Use with KH25A Kitty Hawk Mounting Arm only.
AD25WBZ	Die-cast Wall Mount Box, Allows Housing to Swivel 0° Up to 30°, Bronze Powdercoat Finish. Twist-Lock Photocell Option Not Available With This Mounting.
KHEHZ	Die-Cast Easy-Hang Wall Bracket, Bronze Powdercoat Finish, Includes Hardware.
P18130	480VAC Twist Lock Photocell Receptacle.
P18130R7	7-Pin Twist Lock Photocell Receptacle ANSI C136.41-2013 with Integrated Controls for LED, 480 VAC.
P18131	Twist Lock Non-Shorting (Open) Cap Disconnects Service to Fixture for Temporary or Permanent Disabling (Fixture Always Off). IP65, 480V Maximum.
P18132	Twist Lock Shorting Cap Provides Fixed Service to Fixture (Fixture Always On). IP65, Rated Load 7200w Tungsten.
P18140	110-120VAC Instant Twist Lock
P18142	105-287VAC Instant Twist Lock
P18150	120VAC Time Delay Twist Lock
P18152	277VAC Time Delay Twist Lock

EasyLED Series

EasyLED Varistar Area/Flood/Wall Light



AD25WG



AD25GSZ



FL73SFXZ
(Shown Mounted)



FL73BRZ
(Shown Mounted)



ALMAAZ
(Shown Mounted)



KH25AZ
(Shown Mounted)



KH20RPZ



KH20WMZ



AD25WBZ
(Shown Mounted)



KHEHZ
(Shown Mounted)



P18130



P18130R7



P18131




P18132




P18140,
P18142



P18150,
P18152

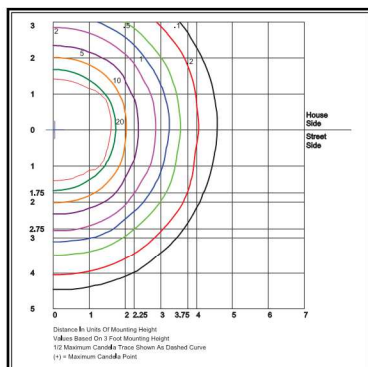

AD25QF1X74U5KC

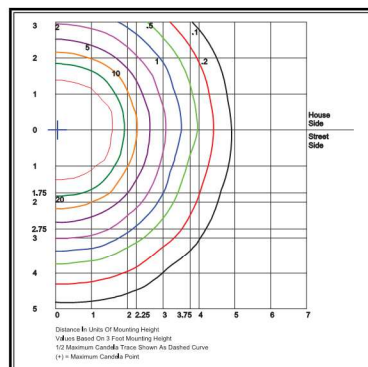

AD25QF1X112U5KC

Bieber Illumination Group
www.bieberillumination.com
garybieber@yahoo.com
 Phone: (310) 451-5589
 Po Box 49303
 Los Angeles, CA. 90049