

Bieber Illumination Group

Makena Bollard

SPECIFICATIONS

Fixture Housing - The Housing is heavy duty corrosion resistant cast aluminum and shall be pure .356 copper free.

The overall fixture height is 45-1/2"

The diameter at the top is 8-1/2"

The diameter at the bottom is 13".

There is a removable hand hole cover on the base of the unit

Lens - Clear or frosted opal acrylic

Electrical Components - Available in both 24w & 48 watt LED. 4000k standard.


The LED assembly is prewired for easy installation. Electrical components are rated for 1 amp but only draws 300mA which adds to the fixtures longevity.

Mounting: Aluminum base plate.

Included with every fixture is stainless steel hardware and (4) galvanized steel anchor bolts. (on center bolt circle)


Finish - The finish is thermoset polyester over-baked powder coat,

Custom colors are available to your specifications.

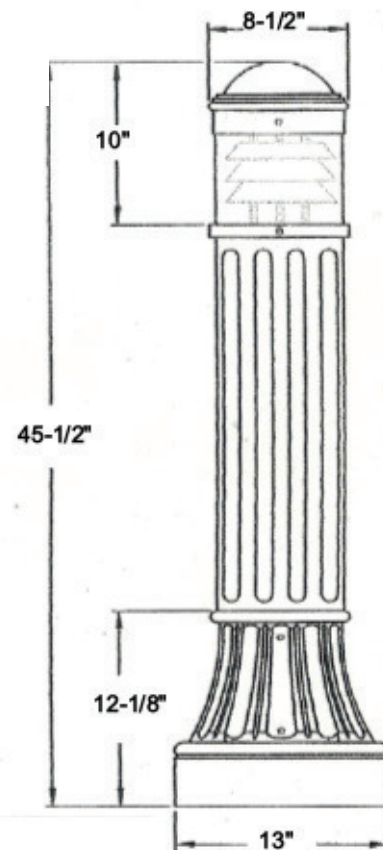

To order, please specify the following catalog number:

LIB-LED 24w (or 48w)-4K-2-L-5-BK/text-MT
clear acrylic lens

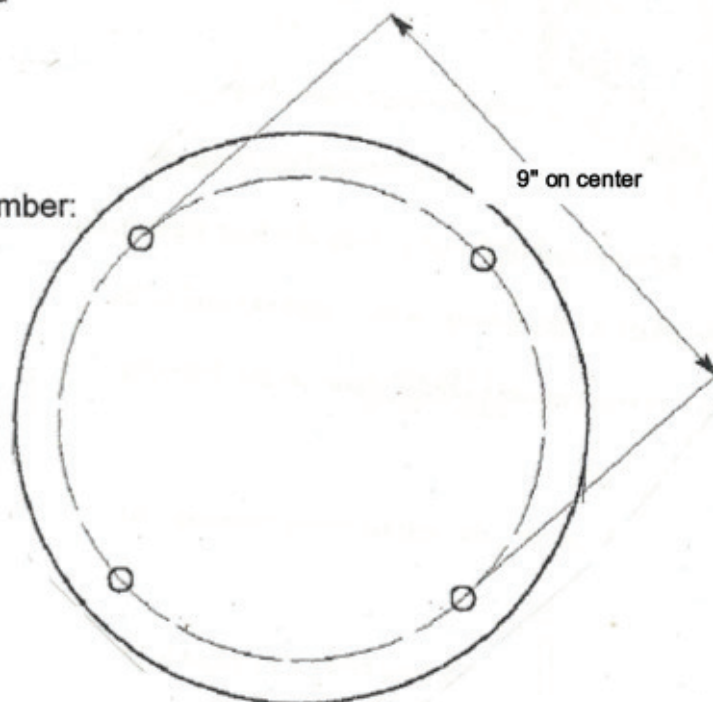

Bieber Illumination Group

PO Box 49303 - Los Angeles, CA. 90049

310-451-5589 - www.bieberillumination.com